


HUAYEE SKID STEER LOADER

MAIN PARAMETERS

HJC25

1. The body is compact and the body width is small
2. Using luffing arm
3. European and American hydraulic components

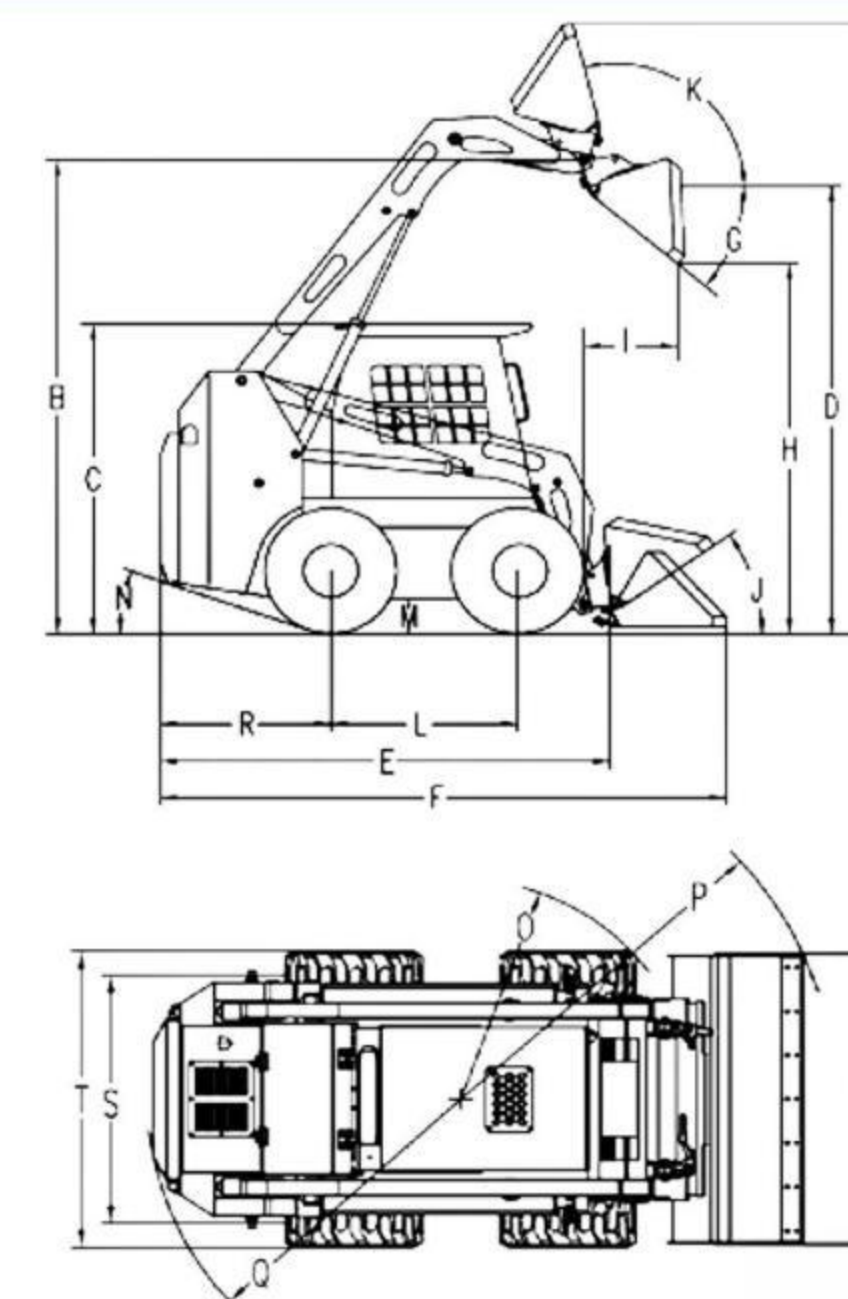


Rated operating capacity:	kg	300	Length with bucket:	mm	3170
Tipping load:	kg	600	Length without bucket:	mm	2430
Bucket capacity:	m ³	0.2	Width with bucket:	mm	1150
Hydraulic pump flow:	L/min	50	Track width:	mm	1110
Engine power:	hp	25	Wheelbase:	mm	801
Weight:	kg	1500	Ground clearance:	mm	180
Max travel speed:	km/h	9	Dumping angle:		40
Grade ability:		20	Dumping height:	mm	1920
Tire :		8.5-15	Maximum reach:	mm	720
Fuel tank:	L	25	Maximum bucket height to its bottom:	mm	2477
Height at maximum extension:	mm	3590	Machine Length (Without Bucket):	mm	2090
Hinge pin height:	mm	2650	Machine Length (With Bucket):	mm	2768
Total height:	mm	2050	Back turning radius:	mm	1146

HUAYEE SKID STEER LOADER

MAIN PARAMETERS

HJC35

1. The body is compact and the body width is small
2. Using luffing arm
3. European and American hydraulic components

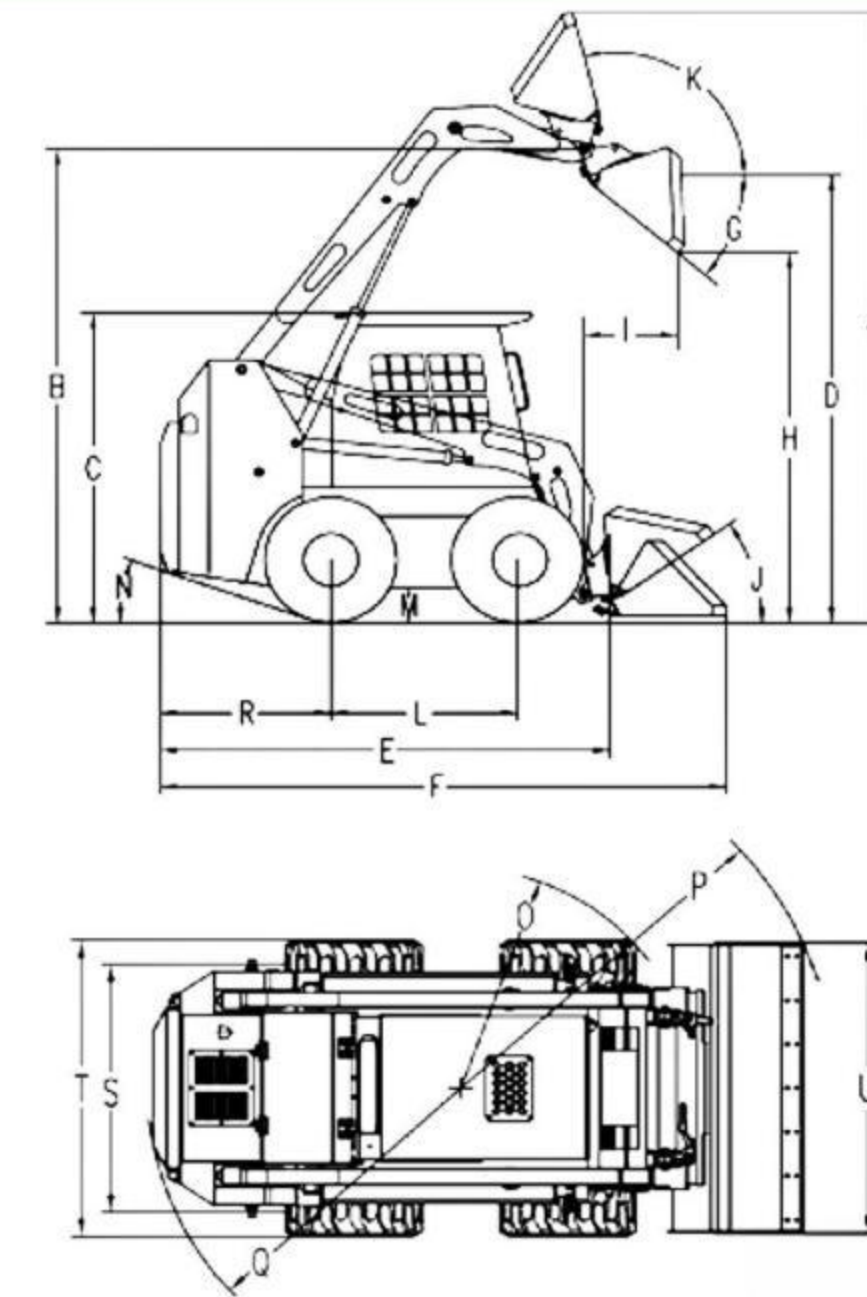


Rated operating capacity:	kg	500	Wheelbase:	mm	891
Tipping load:	kg	1000	Ground clearance:	mm	150
Bucket capacity:	m ³	0.25-0.4	Dumping height:	mm	2050
Operating weight:	kg	2200	Maximum reach:	mm	790
Max. travel speed:	km/h	12	Rollback at ground:		26
Hydraulic pump flow:	L/min	75	Angle of departure:		20
Fuel tank capacity:	L	50	Maker/Model:		XINCHAI 490
Tires:		27*8.5-15-8NHS	Net power:		36.7KW/2600rpm
Overall dimensions:	mm	2900×1300×2000	Type:	4Cylinder in-line, Water cooled, 4 stroke, Diesel engine	
Height at maximum extension:	mm	3300	Displacement:	L	2.156
Height to bucket hinge pin:	mm	2725	Standard configuration:		Standard bucket
Width with bucket:	mm	1300			Open-type operator cab
Track width:	mm	1080			Hydraulic joystick controls

HUAYEE SKID STEER LOADER

MAIN PARAMETERS

HJC45

1. The body is compact and the body width is small
2. Using luffing arm
3. European and American hydraulic components

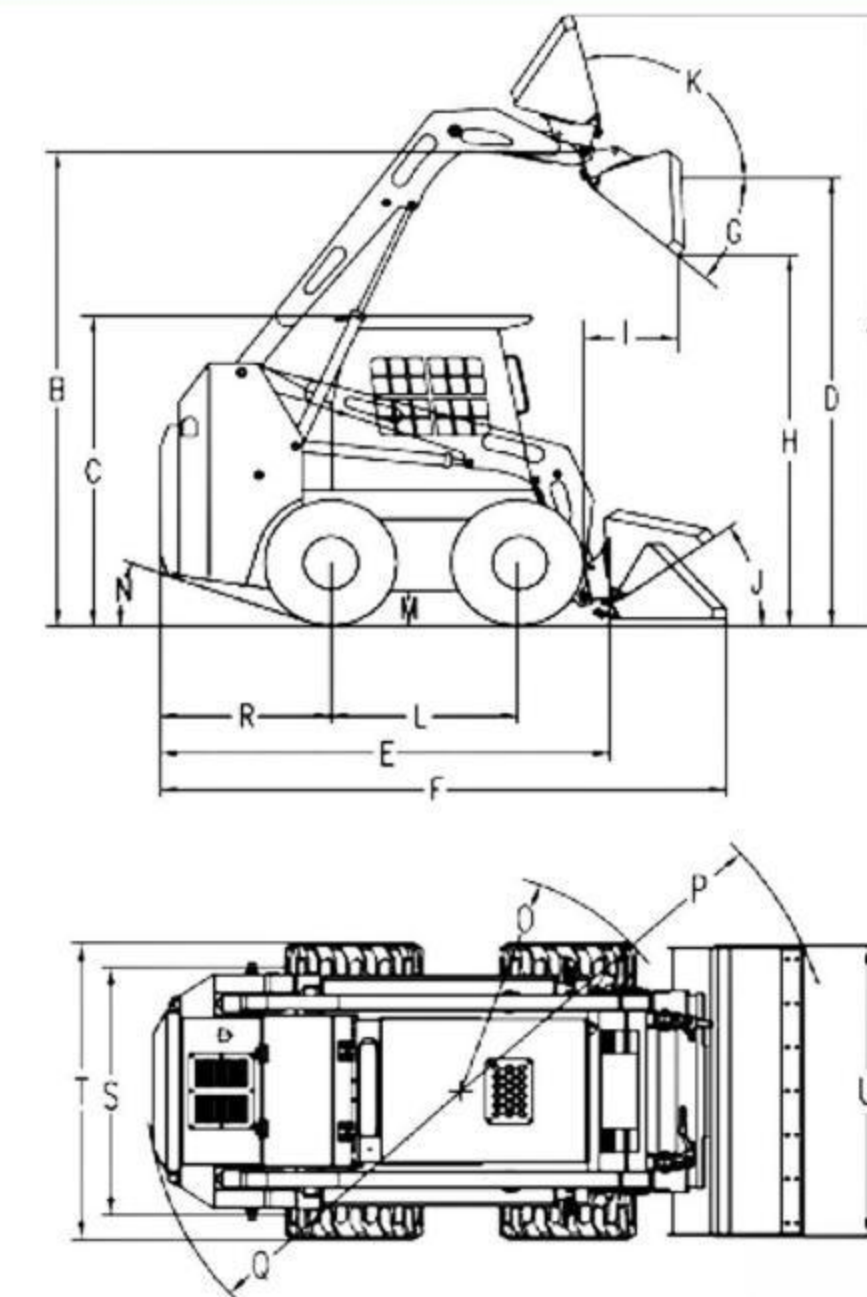


Rated operating capacity:	kg	700	Wheelbase:	mm	991
Tipping load:	kg	1400	Ground clearance:	mm	180
Bucket capacity:	m ³	0.4-0.5	Dumping height:	mm	2380
Operationg weight:	kg	3000	Maximum reach:	mm	790
Max. travel speed:	km/h	12	Rollback at ground:	°	26
Hydraulic pump flow:	L/min	75	Angle of departure:	°	20
Fuel tank capacity:	L	70	Maker/Model:	XINCHAI 490	
Tires :		10-16.5NHS	Net power:	36.7KW/2500rpm	
Overall dimensions:	mm	3350×1720×2150	Type:	4Cylinder in-line, Water cooled, 4 stroke, Diesel engine	
Height at maximum extension:	mm	3980	Displacement:	L	2.7
Height to bucket hinge pin:	mm	3080	Standard configuration:	Standard bucket	
Width with bucket:	mm	1730		Open-type operator cab	
Track width:	mm	1450		Hydraulic joystick controls	

HUAYEE SKID STEER LOADER

MAIN PARAMETERS

HJC60

1. The body is compact and the body width is small
2. Using luffing arm
3. European and American hydraulic components

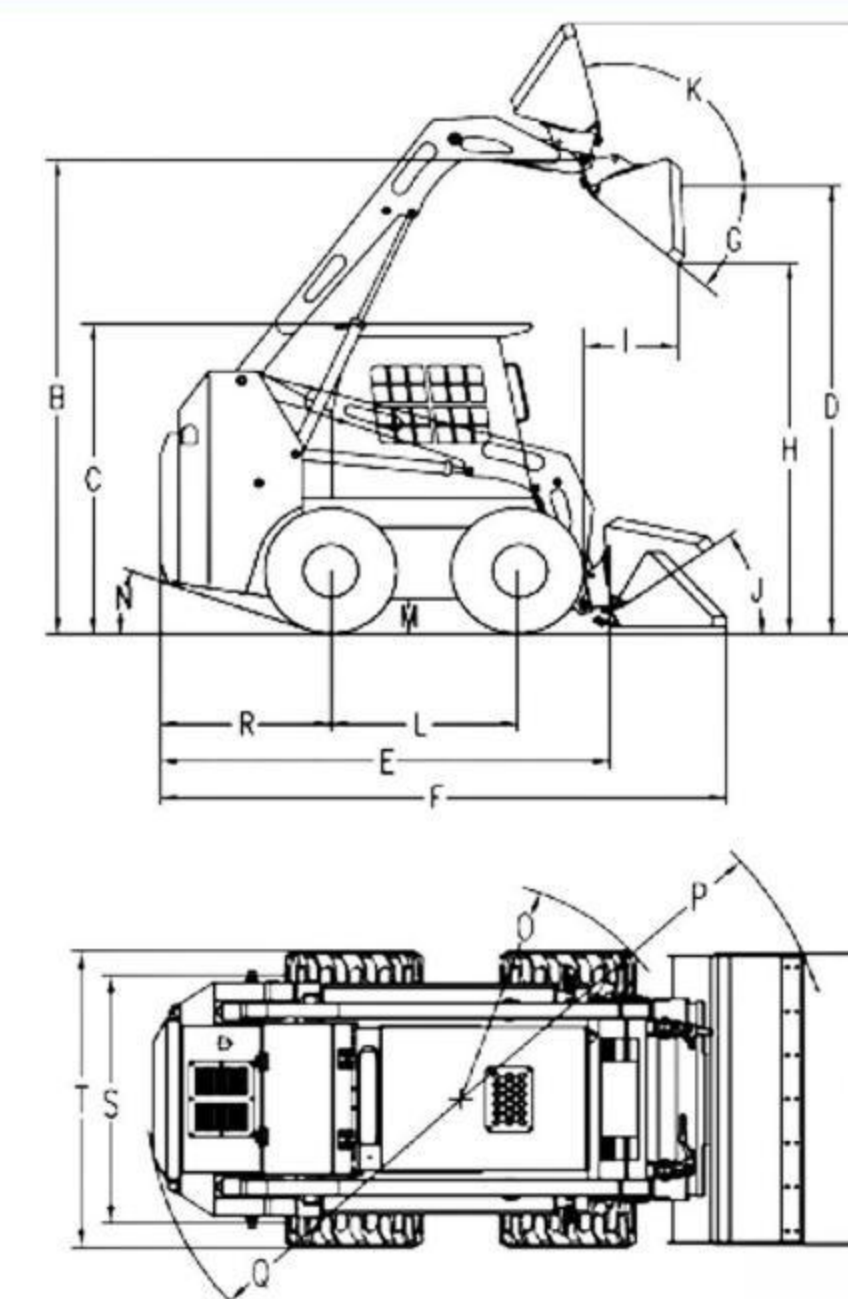


Rated operating capacity:	kg	850	Wheelbase:	mm	1085
Tipping load:	kg	1700	Ground clearance:	mm	200
Bucket capacity:	m ³	0.4	Dump angle:	°	30
Operationg weight:	kg	3300	Dumping height:	mm	2400
Max. travel speed:	km/h	12	Rollback at ground:	°	26
Hydraulic pump flow:	L/min	75	Angle of departure :	°	20
Fuel tank capacity:	L	90	Maker/Model:	XINCHAI A498BPG	
Tires:	12/16.5NHS		Net power:	45KW/2500rpm	
Overall dimensions:	mm	3490×1820×2150	Type:	4Cylinder in-line, Water cooled, 4 stroke, Diesel engine	
Height at maximum extension:	mm	4000	Displacement:	L	3.2
Height to bucket hinge pin:	mm	3100	Standard configuration:	Enclosed operator cab	
Width with bucket:	mm	1830		Standard bucket	
Track width:	mm	1500		Hydraulic joystick controls	

HUAYEE SKID STEER LOADER

MAIN PARAMETERS

HJC65

1. The body is compact and the body width is small
2. Using luffing arm
3. European and American hydraulic components

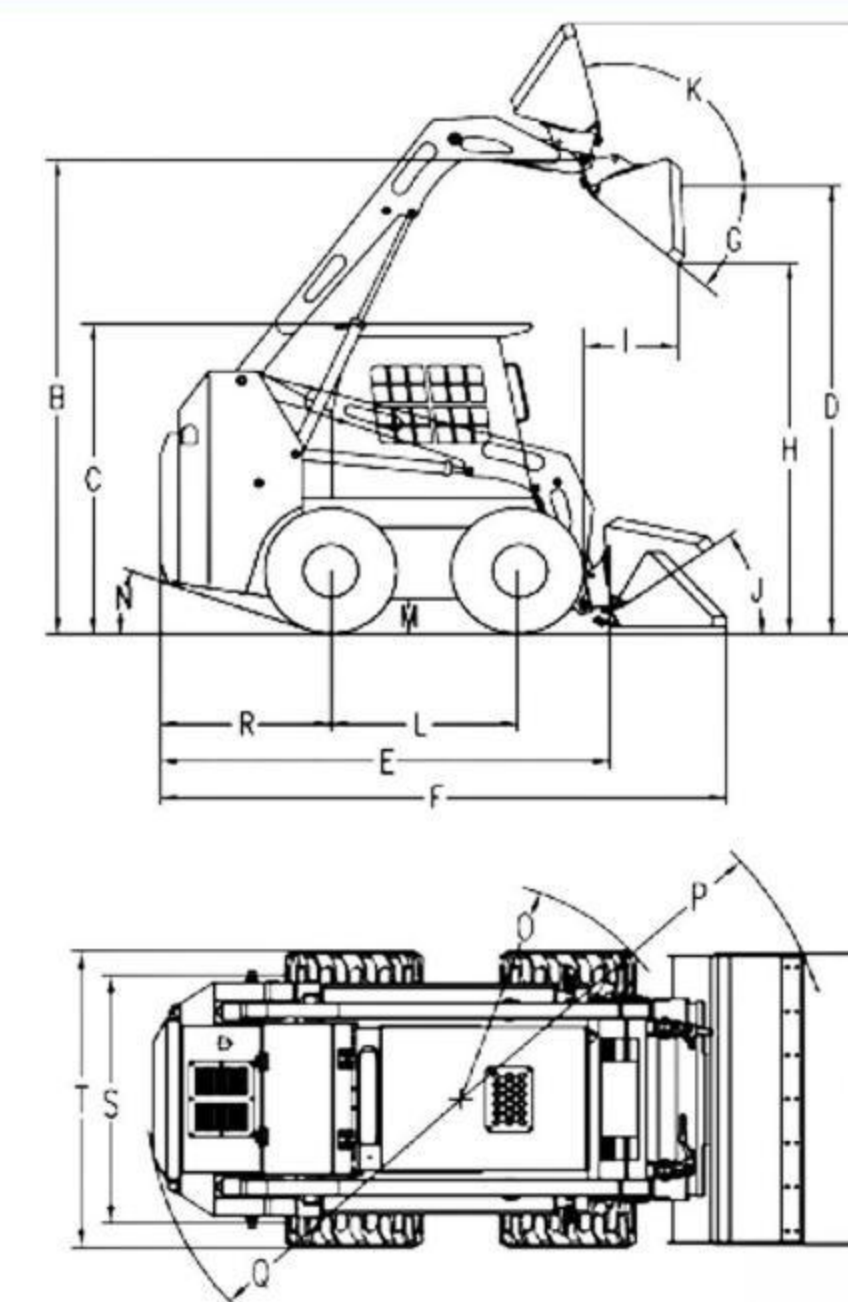


Rated operating capacity:	kg	1050	Wheelbase:	mm	1085
Tipping load:	kg	2100	Ground clearance:	mm	205
Bucket capacity:	m ³	0.5	Dump angle:	°	40
Operationg weight:	kg	3500	Dumping height:	mm	2500
Max. travel speed:	km/h	12	Rollback at ground:	°	26
Hydraulic pump flow:	L/min	75	Angle of departure :	°	20
Fuel tank capacity:	L	80	Maker/Model:	XINCHAI498T (YANGMAR)	
Tires:		12/16.5NHS	Net power:	55KW/2500rpm	
Overall dimensions:	mm	3580×1880×2160 (AC.2250)	Type:	4Cylinder in-line, Water cooled, 4 stroke, Diesel engine	
Height at maximum extension:	mm	4070	Displacement:	L	3.2
Height to bucket hinge pin:	mm	3280	Standard configuration:	Enclosed operator cab	
Width with bucket:	mm	1880		Standard bucket	
Track width:	mm	1500		Hydraulic joystick controls	

HUAYEE SKID STEER LOADER

MAIN PARAMETERS

HJC100

1. The body is compact and the body width is small
2. Using luffing arm
3. European and American hydraulic components

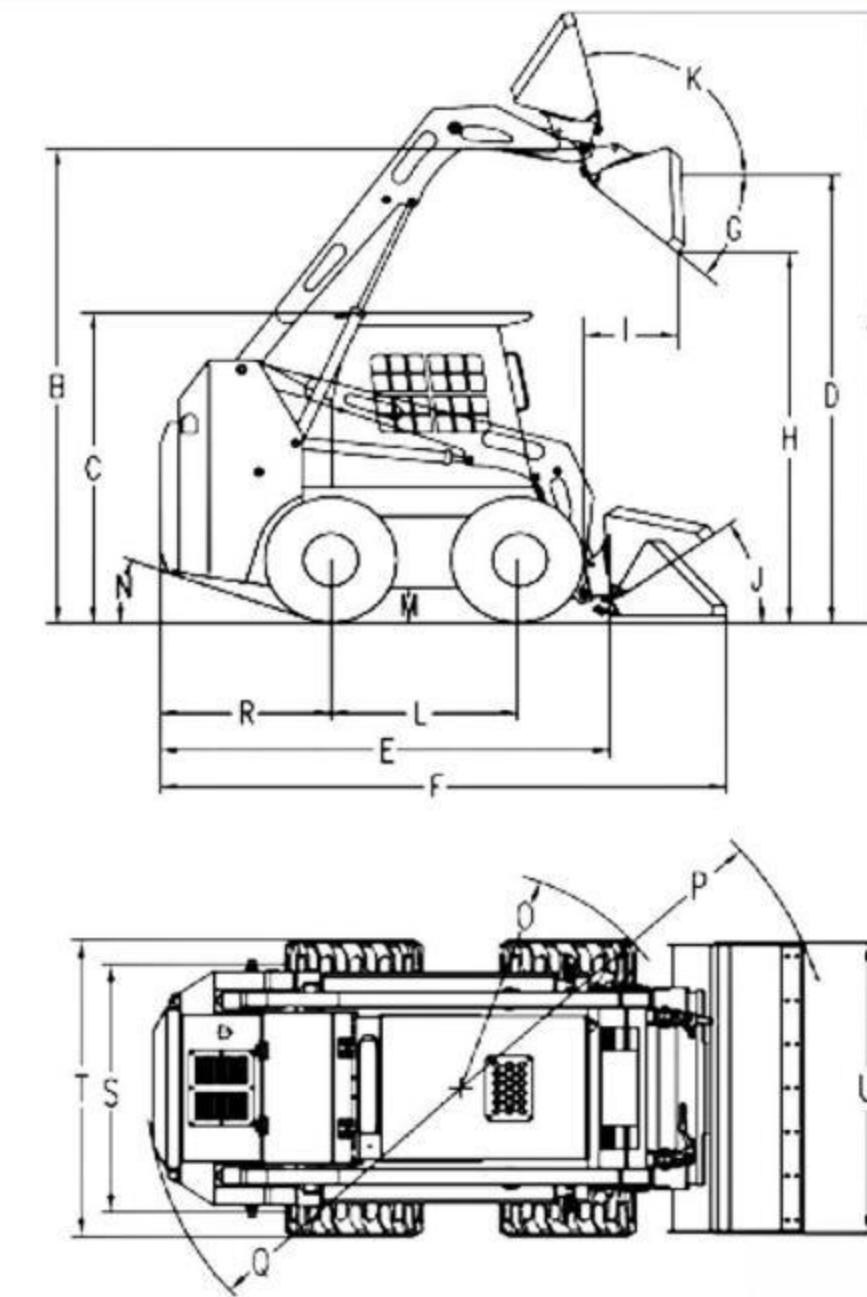


Rated operating capacity:	kg	1100	Wheelbase:	mm	1185
Tipping load:	kg	2200	Ground clearance:	mm	260
Bucket capacity:	m ³	0.7	Dump angle:		40°
Operating weight:	kg	3560	Dumping height:	mm	2450
Max. travel speed:	km/h	9~18	Maximum reach:	mm	710
Hydraulic pump flow:	L/min	80/140	Rollback at ground:		26°
Fuel tank capacity:	L	90	Angle of departure:		20°
Tires:		12/16.5NHS	Maker/Model:	Weichai / Cummins	
Overall dimensions:	mm	3700×1900×2150	Net power:	74.9KW/2500rpm, QSF2.8t4TC74 55KW	
Height at maximum extension :	mm	4070	Type:	4Cylinder in-line, Water cooled, 4 stroke, Diesel engine	
Height to bucket hinge pin:	mm	3150	Displacement:	L	4.1
Width with bucket:	mm	1900	Standard configuration:	Standard bucket / Enclosed operator cab / Hydraulic joystick	
Track width:	mm	1500		controls / Auxiliary hydraulic couplers	

HUAYEE SKID STEER LOADER

MAIN PARAMETERS

HTS50

1. The body is compact and the body width is small
2. Using luffing arm
3. European and American hydraulic components

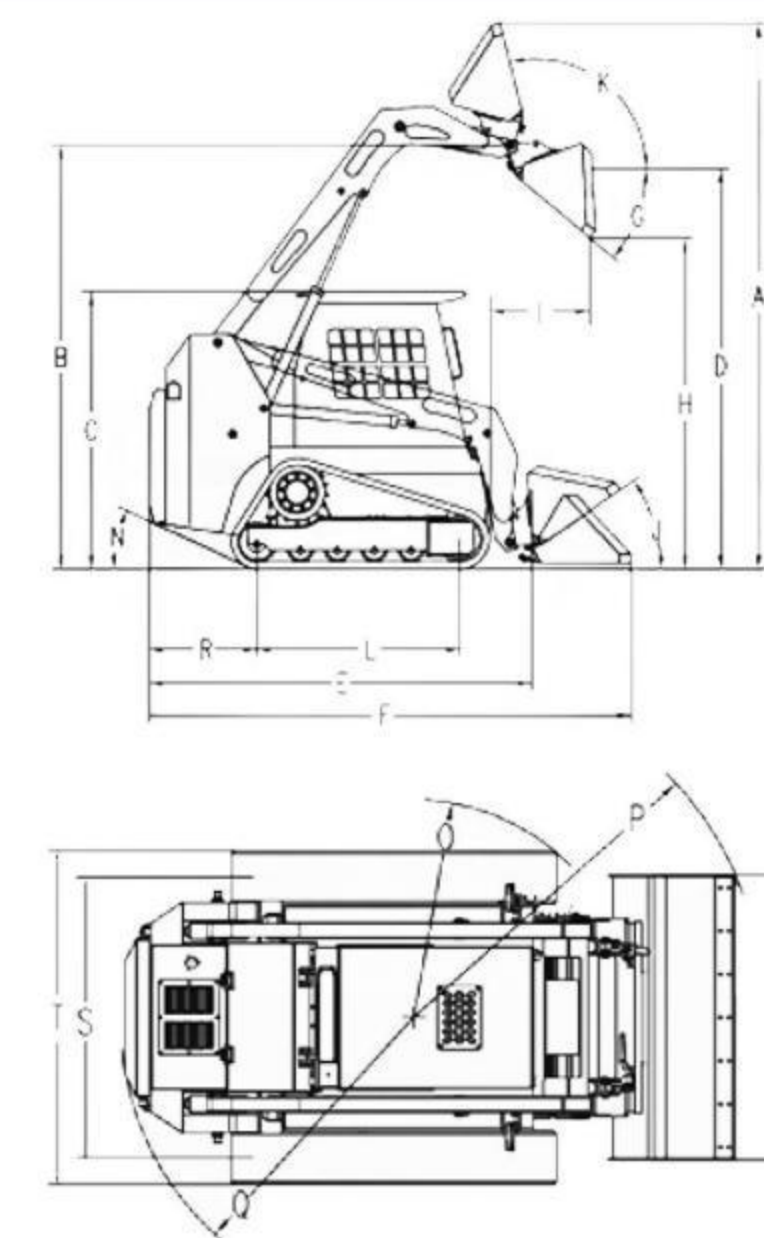

Rated operating capacity:	kg	700	Engine Maker/Model:	Xinchai 490 (engine optional)/LS 42.5kw	
Bucket capacity:	m ³	0.35	Net power:	36.7KW/2500rpm	
Operationg weight:	kg	2800	Type:	4 Cylinder in-line, Water cooled, 4 stroke, Diesel engine	
Max. travel speed:	km/h	10	Displacement:	L	2.7
Hydraulic pump flow:	L/min	60	Standard:	Standard bucket	
Fuel tank capacity:	L	50		Open-type operator cab	
Overall dimensions:	mm	2950×1402×2050		Hydraulic joystick controls	
Height to bucket hinge pin:	mm	2770		Auxiliary hydraulic couplers	
Width with bucket:	mm	1500	Dumping angle at maximum height:	°	40
Track width:	mm	300	Dumping reach:	mm	790
Track ground length:	mm	1240	Front tuning radius:	mm	1825
Ground clearance:	mm	180	Rear tuning radius:	mm	1264
Max speed:	km/h	2050	Tread width:	mm	1102


HUAYEE SKID STEER LOADER

MAIN PARAMETERS



HTS65

- 1. The body is compact and the body width is small
- 2. Using luffing arm
- 3. European and American hydraulic components

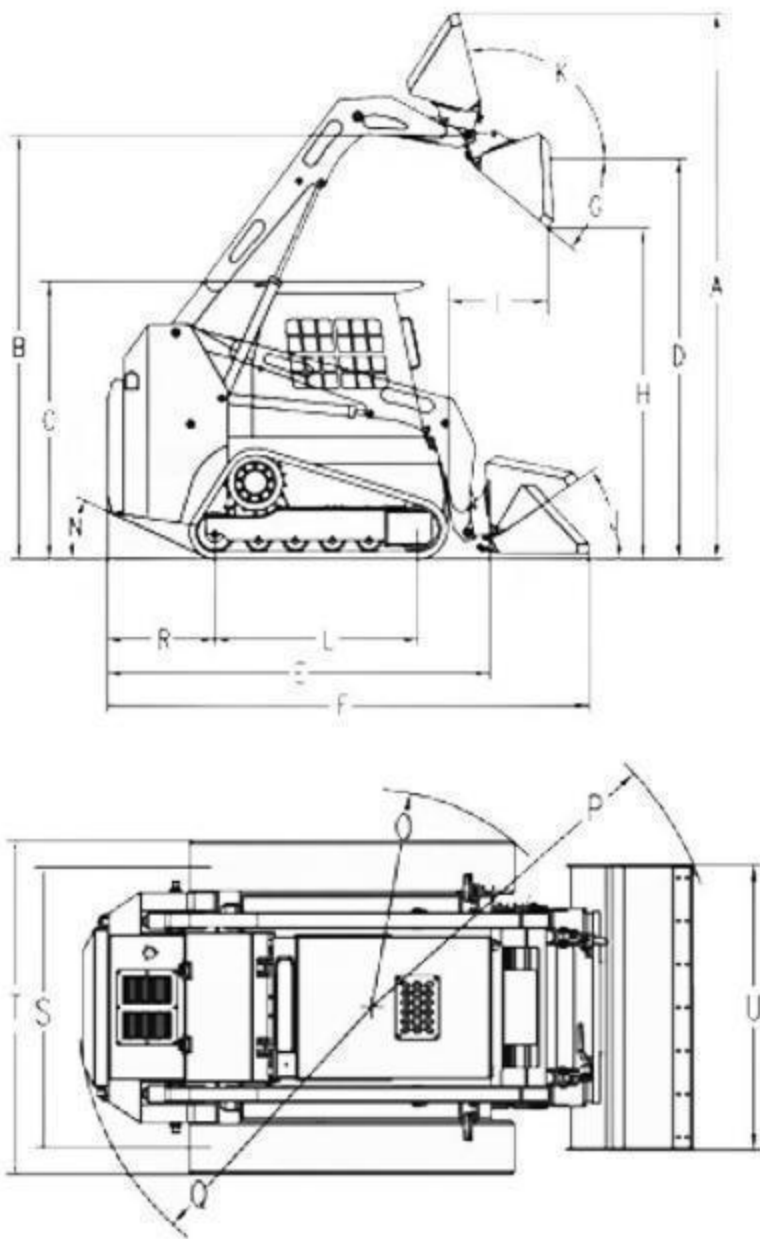


Rated operating capacity:	kg	1000	Width with bucket:	mm	1830
Bucket capacity:	m³	0.5	Track width:	mm	320
Operationg weight:	kg	3800	Track ground length:	mm	1500
Max. travel speed:	km/h	12	Ground clearance:	mm	200
Hydraulic pump flow:	L/min	80	Maker/Model:	XInCHAI 4D32ZG31	
Fuel tank capacity:	L	90	Net power:	55KW/2500rpm	
Overall dimensions:	mm	3500×1782×2150	Type:	4Cylinder in-line, Water cooled, 4 stroke, Diesel engine	
Height to bucket hinge pin:	mm	2900	Displacement:	L	3.1

HUAYEE SKID STEER LOADER

MAIN PARAMETERS

HTS100

1. The body is compact and the body width is small
2. Using luffing arm
3. European and American hydraulic components

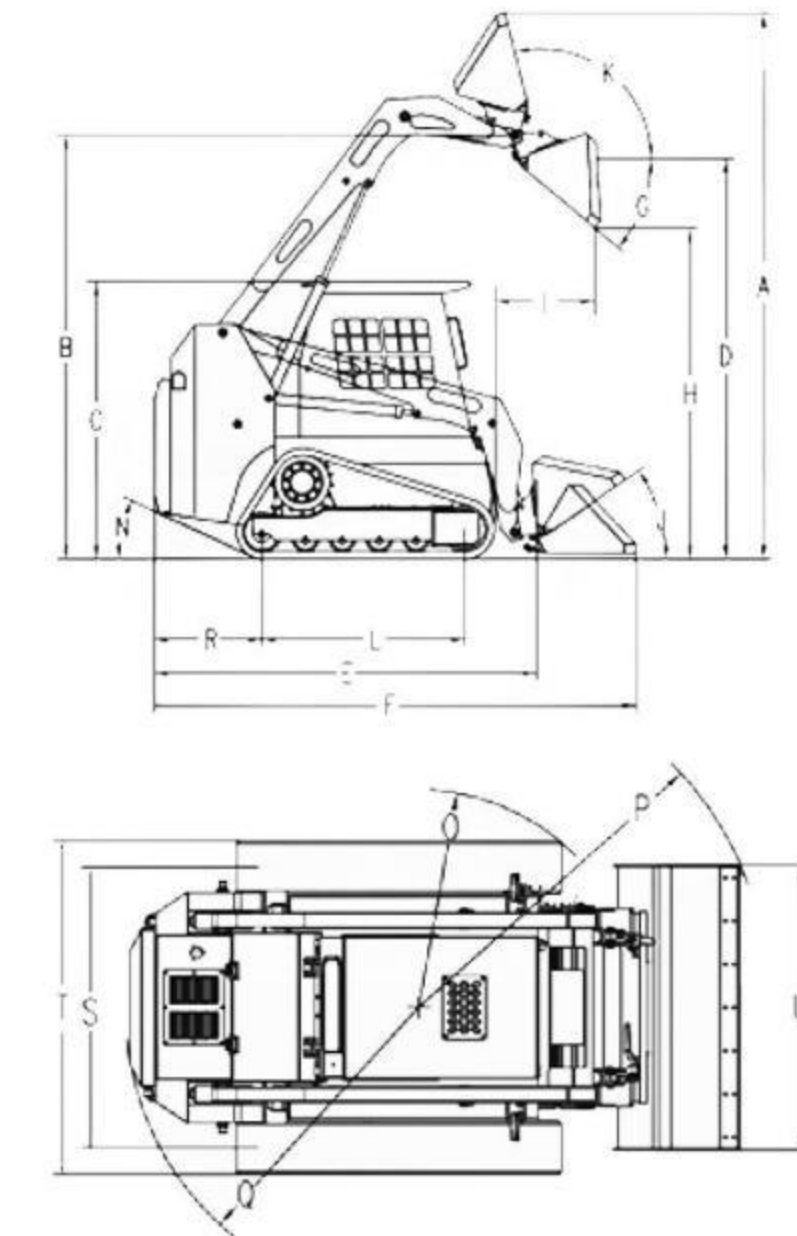


Rated operating capacity:	kg	1200	Engine Model:	WEICHAI
Bucket capacity:	m ³	0.6-0.7	Net power:	74.9KW/2500rpm
Operationg weight:	kg	4500	Type:	4 Cylinder in-line, Water cooled, 4 stroke,Diesel engine
Max. travel speed:	km/h	9/18	Displacement:	L 4.1
Hydraulic pump flow:	L/min	88/1140	Standard:	Standard bucket
Fuel tank capacity:	L	90		Enclosed operator cab with
Overall dimensions:	mm	3700×1994×2160		Hydraulic joystick controls
Height to bucket hinge pin:	mm	2920		Auxiliary hydraulic couplers
Width with bucket:	mm	1850	Optional (additional price):	High-flow hydraulic system
Track width:	mm	320		Prehest starting assist system for extreme cold weather
Track ground length:	mm	1500		
Ground clearance:	mm	200		

HUAYEE SKID STEER LOADER

MAIN PARAMETERS

HTS120

1. The body is compact and the body width is small
2. Using luffing arm
3. European and American hydraulic components

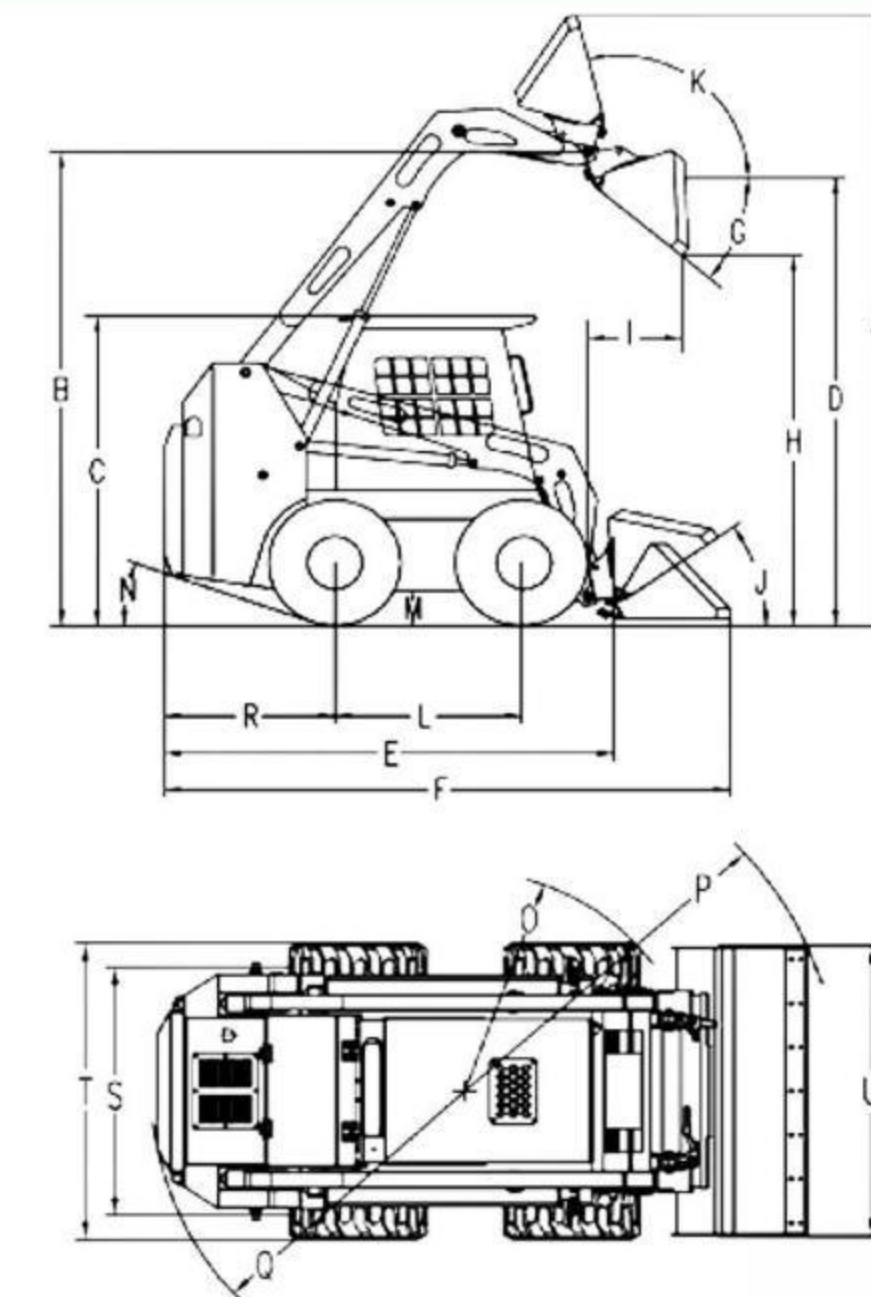

Rated operating capacity:	kg	1500	Track ground length:	mm	1500
Bucket capacity:	m³	0.6-0.7	Ground clearance:	mm	200
Operationg weight:	kg	4800	Maker/Model:	Weichai	
Max. travel speed:	km/h	9/18	Net power:	103kW/2500rpm	
Hydraulic pump flow:	L/min	80/130	Type:	4 Cylinder in-line, Water cooled,4 stroke,Diesel engine	
Fuel tank capacity:	L	85	Displacement:	L	4.1
Overall dimensions:	mm	3700×1994×2150	Standard configuration:	Standard bucket / Enclosed operator cab with / Hydraulic	
Height to bucket hinge pin:	mm	2920	joystick controls / Auxiliary hydraulic couplers		
Width with bucket:	mm	1850	Optional configuration :	High-flow hydraulic system	
Track width:	mm	320	Prehest starting assist system for extreme cold weather		